


ADHESIVE SOLUTIONS FOR AIRTIGHT SEALING OF VAPOUR BARRIERS




RM FIX VAPOR Y200 SINGLE-SIDED TAPE

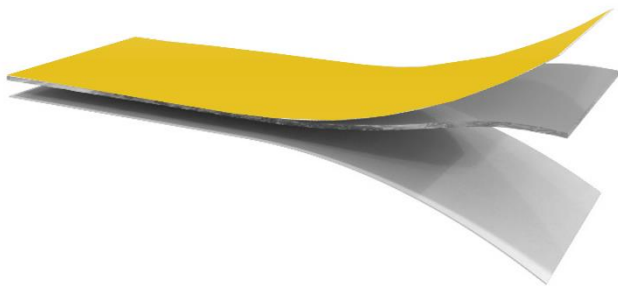

- Water repellent paper
- Permanent solvent-free adhesive
- Paper liner

**READY-TO-USE
TAPE**

- Complete bonding and airtight of vapour layers
- Sealing of board joints
- Powerful and permanent bonding
- Efficient in low temperatures  Application temperature: from -10°C
Operating temperature: from -30°C to 90°C
- Humidity resistant thanks to PE coating and specific glue
- Easy-to-use: paper backing allow perfect handling
- Tearable by hand

PRESENTATION & PACKAGING

60 mm x 25m roll. For any other presentation, please contact us.

TECHNICAL DATA

	INDICATIVE VALUES	TEST METHOD
Thickness without liner	270µ	
Peel adhesion on steel		
Dwell time 24h - 180°	> 30N/25mm	Afera 5001
Application min Temperature	-10°C	
Continuous service Temperature	-30°C to 90°C	

RECOMMENDATIONS

Surfaces to which adhesive is applied must be clean, dry and free of dust, release agent, grease and oil.

Certain substrates contain oils or plasticizers which may deteriorate the performance of the adhesive. This is why in some cases it is advisable to perform an ageing test in a climate chamber which will help to assess this risk.

STORAGE

The shelf life is 12 months, when stored in its original packaging, out of direct sunlight, at temperature between +5°C and +40°C. Once removed from its packaging, the product should be protected against dust, impurities and insects.

REMARKS

The above mentioned product could be used for a wide range of substrates.

We recommend to all purchasers to determine carefully, prior to use, the suitability of our product for their specific purposes. They shall assure by their own tests the compatibility with each intended use. Information supplied is accurate to the best of Adesia knowledge and is based upon all current data available to it. Properties quoted are typical and do not therefore constitute a specification.

