


NAIL SEALING TAPE



RM ISOLAFIX

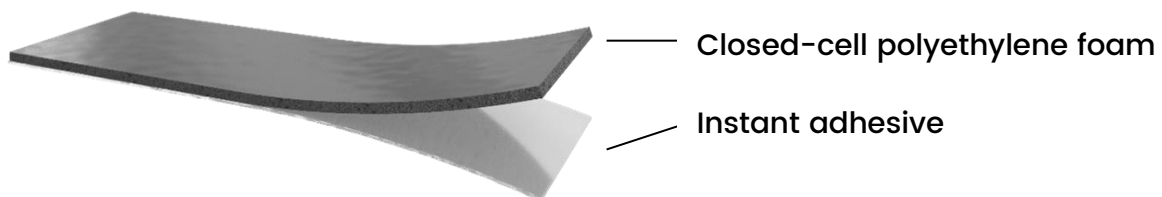

- For waterproof sealing of nail or screw penetrations in roof membranes, when installing the counter battens
- High resilience foam, keeps its thickness
- High resistance to ageing, temperature and moisture
- No liner, no waste
- Quick and easy to install under counter battens or on the membrane.

READY-TO-USE
TAPE

PACKAGING & PRESENTATION

50 mm x 30 m rolls	18 rolls/box 744x361x500 mm	6 boxes/pallet 80x120 cm
--------------------	-----------------------------	--------------------------

Please contact us for any other presentation.

TECHNICAL DATA

	TYPICAL VALUES	TEST METHOD
Tensile strength		
Lengthwise	> 540 kPa	ISO 1926
Crosswise	> 300 kPa	
Tensile elongation		
Lengthwise	> 90%	ISO 1926
Crosswise	> 90%	
Peeling adhesion on steel		
Dwell time 24h - 90°	5 N/inch	Finat 2
Loop Tack	19 N / inch	Finat 9
Application min Temperature	+5°C	
Temperature resistance	-30°C to +80°C	

RECOMMENDATIONS

Surfaces to which adhesive is applied must be clean, dry and free of dust, release agent, grease and oil.

Certain substrates contain oils or plasticizers which may deteriorate the performance of the adhesive. This is why in some cases it is advisable to perform an ageing test in a climate chamber which will help to assess this risk.

STORAGE

The shelf life is 12 months, when stored in its original packaging, out of direct sunlight, at temperature between +5°C and +35°C. Once removed from its packaging, the product should be protected against dust, impurities and insects.

REMARKS

The above mentioned product could be used for a wide range of various applications.

We recommend to all purchasers to determine carefully, prior to use, the suitability of our product for their specific purposes. They shall assure by their own tests the compatibility with each intended use. Information supplied is accurate to the best of Adesia knowledge and is based upon all current date available to it. Properties quoted are typical and do not therefore constitute a specification.

