


PRODUCT

RANGE TRANSFIX

REFERENCE : AT S208/60 PA90

DESCRIPTION

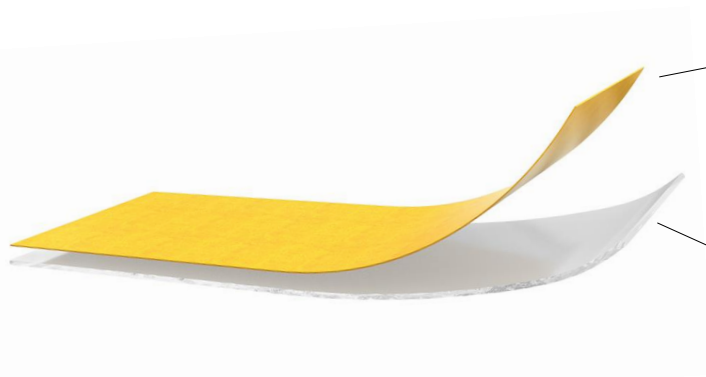

RELEASE LINER: Silicone-coated paper 90g/m²

ADHESIVE: Acrylic solution adhesive 60g/m²

APPLICATIONS FIELDS



- **Good resistance to humidity and UV.**
- **Good conformability to flat or curved surface**
- **Ensures good adhesion properties.**
- **Suitable for printing and graphic art applications**
- **Excellent resistance to ageing**



TECHNICAL DATA

	TYPICAL VALUES	TEST METHOD
Peel adhesion on steel		
Dwell time 24h - 180°	33 N / inch	Afera 5001
Peel adhesion on PP		
Dwell time 24h - 180°	7 N / inch	Afera 5001
Loop Tack	13 N / inch	Finat 9
Temperature shear resistance	43°C	SAFT
Application min Temperature	+5°C	
Continuous service Temperature	-30°C to +80°C	
Short Pick	+100°C	

RECOMMENDATIONS

Surfaces to which adhesive is applied must be clean, dry and free of dust, release agent, grease and oil.

Certain substrates contain oils or plasticizers which may deteriorate the performance of the adhesive. This is why in some cases it is advisable to perform an ageing test in a climate chamber which will help to assess this risk.

STORAGE

The shelf life is 6 months, when stored in its original packaging, out of direct sunlight, at temperature between +5°C and +35°C. Once removed from its packaging, the product should be protected against dust, impurities and insects.

STANDARD PACKAGING

Standard log length : 200/250/500 meters.

Standard width : 1000/1250/1500/2000 mm.

Other possibilities out of standard are possible upon request.

REMARKS

The above mentioned product could be used for a wide range of various applications.

We recommend to all purchasers to determine carefully, prior to use, the suitability of our product for their specific purposes. They shall assure by their own tests the compatibility with each intended use. Information supplied is accurate to the best of Adesia knowledge and is based upon all current date available to it. Properties quoted are typical and do not therefore constitute a specification.



Product datasheet AT S208/60 PA90,
Modification Date : 01/26/2017



243 rue de Chavanne - ZAC de Chavanne - 69400 Arnas
Tél. : +33 (0)4 74 68 22 55 - Fax : +33 (0)4 74 68 71 00
contact@adesia.com - www.adesia.com